



The subject matter shown and described in this drawing and any other information advanced in connection therewith is to be held in strict confidence. All rights to any designs, inventions, trademarks, and copyrights disclosed are reserved to Dreison International Inc.

B

A

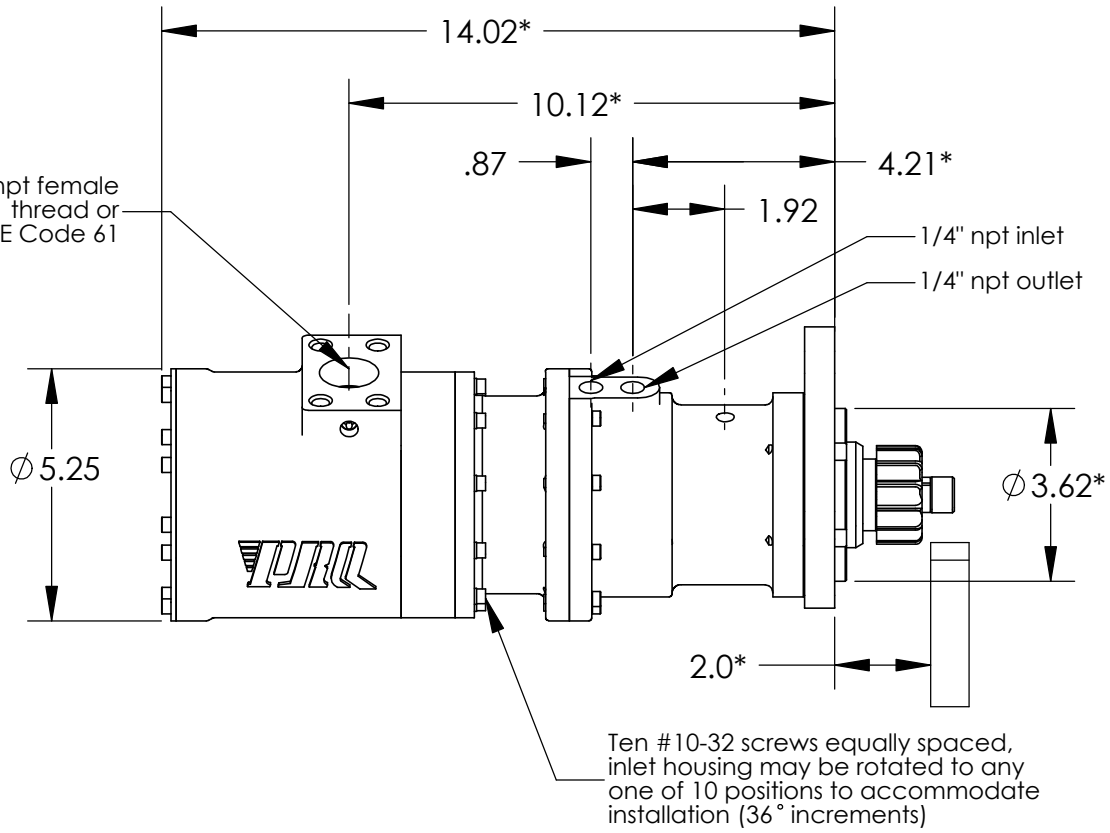

Six 1/4"-28 screws equally spaced, flange may be rotated to any one of 6 positions to accommodate installation (60° increments)

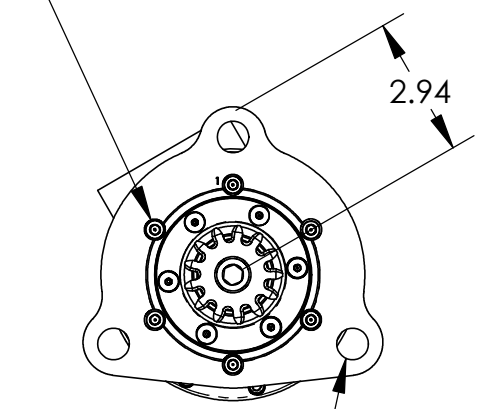

\* These dimensions/features may vary by starter model

THIRD ANGLE PROJECTION 	INTERPRET IN ACCORDANCE WITH ANSI Y14.5M-1982
STD TOLERANCES (UNLESS OTHERWISE NOTED)	
Fractional ±1/32	Decimal .XX± 0.010 .XXX± 0.005
Angular ±1°	
WHOLE NUMBERS & 1 PLACE DECIMALS ARE REFERENCE DIMENSIONS ONLY	
DIMENSIONS IN INCHES [mm]	DO NOT SCALE
Created- 2-15-10	Author - RDINGESS
Checked - PDE	



**MARADYNE**  
POW-R-QUIK  
Cleveland, Ohio

TITLE <b>PRQ 22OH TURBINE STARTER W/ SCREEN</b>			
SIZE <b>A</b>	FSCM NO. <b>ODBY7</b>	DWG. NO. <b>37xxx W/ SCREEN</b>	REV <b>A</b>
APPROVED	SCALE <b>1:4</b>	SHEET <b>SHEET 1 OF 1</b>	

REV	DATE	DESCRIPTION	ZONE	ECN